BEST AVAILABLE COPY

PCT





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

A62B 18/08, B63C 11/26, G10K 11/22

(11) International Publication Number:

WO 97/37724

(43) International Publication Date:

16 October 1997 (16.10.97)

(21) International Application Number:

PCT/AU97/00216

A1

(22) International Filing Date:

3 April 1997 (03.04.97)

(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, DT, SE)

PT, SE)

(30) Priority Data:

PN 9155

4 April 1996 (04.04.96)

ΑU

Published

With international search report.

(71) Applicant (for all designated States except US): SAFETY EQUIPMENT AUSTRALIA PTY. LTD. [AU/AU]; North Shore Business Park, 35/1 Jubilee Avenue, Warriewood, NSW 2102 (AU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): JERVMO, Bengt, Yngve, Roland [SE/AU]; 40 James Sea Drive, Green Point, NSW 2251 (AU). KLOCKSETH, Martinus, Oliver [SE/AU]; 90 Ashburn Avenue, Belrose, NSW 2085 (AU). BERNDTS-SON, Goran, Bertil, Claes [AU/AU]; 19 Care Free Road, Elanora Heights, NSW 2101 (AU).

(74) Agent: F. B RICE & CO.; 28A Montague Street, Balmain, NSW 2041 (AU).

(54) Title: A COMMUNICATION INTERFACE FOR BREATHING EQUIPMENT

(57) Abstract

This invention concerns all types of breathing equipment, ranging from simple passive systems where air is drawn through a filter in a face-mask by the wearer's breathing action, to sophisticated powered systems which supply clean air at a regulated positive pressure. In all cases, because some form of face-mark or hood must be worn communication by the wearer is severely restricted. The invention provides breathing protection equipment including acoustic coupling to a remotely located microphone. The microphone may, for example, be contained together with its electrical supply and a transmitter in the wearer's breast pocket, and be connected with the face mask of the breathing protection equipment by means of a flexible sound pipe. These arrangements place the microphone, and all other electrical parts remotely from the mask. Among other things this facilitates regular cleaning of the mask, and may improve the reliability of the system generally.

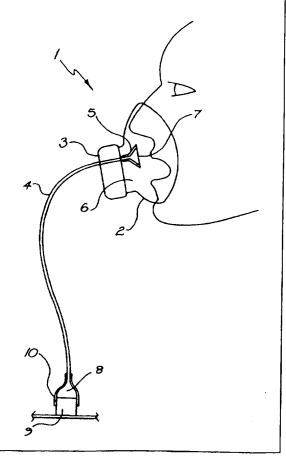

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM A AT A AU A AZ A BA E	Albania Armenia Austria Australia Azerbaijan Bosnia and Herzegovina Barbados	ES FI FR GA GB GE GII	Spain Finland France Gabon United Kingdom Georgia	LT LU LV MC	Lithuania Luxembourg Latvia Monaco	SK SN SZ	Slovakia Senegal Swaziland
AT A AU A AZ A BA E	Austria Australia Azerbaijan Bosnia and Herzegovina Barbados	FR GA GB GE	Gabon United Kingdom	LV	Latvia	SZ	Swaziland
AU A AZ A BA E	Australia Azerbaijan Bosnia and Herzegovina Barbados	GA GB GE	Gabon United Kingdom	_			- "
AZ A	Azerbaijan Bosnia and Herzegovina Barbados	GB GE	United Kingdom	MC	14		
BA F	Bosnia and Herzegovina Barbados	GE	-		Monaco	TĐ	Chad
	Barbados			MD	Republic of Moldova	TG	Togo
			Ghana	MG	Madagascar	TJ	Tajikistan
	Belgium	GN	Guinea	MK ¹	The former Yugoslav	TM	Turkmenistan
	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
	Benin Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
-	Brazil	iL	Israei	MR	Mauritania	UG	Uganda
	Belarus	IS	Iceland	MW	Malawi	บร	United States of America
	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
	Central African Republic	JР	Japan	NE	Niger	VN	Viet Nam
	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
	Cameroon		Republic of Korea	PL	Poland		
	China	KR	Republic of Korea	PT	Portugal		
	Cuba	KZ	Kazakstan	RO	Romania		
-		LC	Saint Lucia	RU	Russian Federation		
	Czech Republic	Li	Liechtenstein	SD	Sudan		
	Germany	LK	Sri Lanka	SE	Sweden		
	Denmark	LR	Liberia	SG	Singapore		
EE !	Estonia	LK	LIUCIA	30	om Parkare		

WO 97/37724 PCT/AU97/00216

A COMMUNICATION INTERFACE FOR BREATHING EQUIPMENT Technical Field

This invention concerns all types of breathing protection and diving equipment, ranging from simple passive systems where air is drawn through a filter in a face-mask by the wearer's breathing action, to sophisticated powered systems which supply clean air at a regulated positive pressure. In all cases, because some form of face-mask or hood must be worn, communication by the wearer is severely restricted.

Background

5

10

15

20

25

30

35

To address the problems of communication while wearing a breathing protection mask, electrical connectors and microphones have been introduced into the masks.

Disclosure of the Invention

The invention provides breathing equipment including a face part that in use is adjacent at least the mouth of the wearer, the face part being associated with acoustic coupling to a remotely located microphone. The breathing equipment may be used for breathing protection or diving applications.

The microphone may, for example, be contained together with its electrical supply and a transmitter in the wearer's breast pocket, and be connected with the face mask of the breathing protection equipment by means of a flexible sound pipe. These arrangements place the microphone, and all other electrical parts remotely from the mask. Among other things this facilitates regular cleaning of the mask, and may improve the reliability of the system generally.

The acoustic coupling may comprise a sound pipe which may be made of simple flexible tubing, such as tubing made from plastics materials.

A face mask may act as a pressure box and the upper end of the sound pipe can be positioned within the mask cavity. The sound pipe may enter the cavity through a port fabricated in the mask, or through the air supply valving.

Alternatively, the sound pipe may have a flared end to funnel the sound pressure waves caused by speech into the pipe.

A membrane may be provided over the upper end of the sound pipe to prevent moisture or other material from entering it. 5

10

15

20

25

35

At the lower end the sound pipe may be sealed into a package which also contains the microphone, to provide good transfer of the sound pressure to the microphone. The seal is preferably pneumatic, but if there were a small hole the system will still function. The pressure transmission medium in the pipe may be gaseous or liquid.

The cut off frequency for an acoustic coupling pipe is proportional to its diameter, and the medium in the pipe. A tube of 50mm diameter in air will have a cut off frequency of approximately 3KHz, which is just sufficient for the transfer of intelligible speech. An important advantage of the invention arises from having the speaker and the remote microphone both located in essentially the same pressure chamber. The pressure chamber is split into two compartments which are connected together by the acoustic coupling. The acoustic coupling may provide either an hydraulic or pneumatic link to maintain the two compartments at the same pressure, and this enables a pipe of small diameter to be utilised for the acoustic coupling. Specifically the diameter of the pipe may be less than that expected to be required by consideration of the diameter and the medium, because of the equal pressures at either end.

In order to cancel ambient noise, two microphones may be connected in a noise cancelling arrangement. The first microphone may pick up the noise plus the speech signals, and the second microphone may be arranged to pick up only the noise signals. An electronic circuit will subtract the two signals in order to provide a clean speech signal.

Brief Description of the Drawings:

An example of the invention will now be described with reference to: Figure 1 which is a schematic illustration of an embodiment of the invention; and

Figure 2 which is a circuit diagram showing electrical treatment of the sound signals picked up by the embodiment of Figure 1.

30 <u>Disclosure of the Best Modes of the Invention</u>

Referring first to Figure 1 the breathing protection equipment 1 comprises a face mask 2 with some kind of air supply port 3. A sound pipe 4, comprising clear PVC having a inner diameter of 1.5mm, penetrates the mask and terminates in a flared funnel 5 within the mask cavity 6. A membrane 7 covers the open end of the funnel 5.

5

10

15

20

25

30

~ (jy

* **

.

.

At the lower end, sound pipe 4 is pneumatically sealed in a cavity 8 together with a microphone 9, by means of an adaptor 10. By this means the sound pressure change inside the sealed breathing mask cavity 6 are pneumatically communicated to the sealed cavity 8 and microphone 9 via the air in the sound pipe 4.

A second microphone (not shown) is also associated with the lower end of the sound pipe, however, this microphone only picks up ambient noise and does not receive any of the sound communicated by sound pipe 4. Referring now to Figure 2, the speech and noise signal 11 from microphone 8 is fed to the non-inverting input of an amplifier 12, and the noise signal 13 picked up by the second microphone is fed to the inverting input of amplifier 12. Amplifier 12 subtracts the noise signal from the speech and noise signal to output a clean speech signal 14.

Although the invention has been described with reference to a particular example, it should be appreciated that it may be embodied in many other forms. In particular it should be appreciated that the invention is not restricted to breathing protection equipment of the type which involves use of a face mask, and it may be applied to those systems where there is no mask cavity, such as hoods or visors. In those situations the flare at the upper end of the sound pipe is adapted to provide a sound pick up (or collection) cavity. When a mask is used the flare may be dispensed with, since the mask cavity will act as a sound collector.

It should also be appreciated that the invention will operate with sound pipes of diameters with a broad range of inner diameters less than about 50mm. Inner diameters of between 1 and 5mm have been found to operate well. The sound pipe could also be used for air supply in which case a wider diameter could be used.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.


5

15

CLAIMS:

- 1. Breathing equipment including a face part that, in use is adjacent at least the mouth of a wearer, the face part being associated with acoustic coupling means which provide acoustic coupling to a remotely located microphone.
- 2. Breathing equipment according to claim 1, wherein the breathing equipment is breathing protection equipment.
- 3. Breathing equipment according to claim 1, wherein the breathing equipment is breathing diving equipment.
- 10 4. Breathing equipment according to claims 1, 2 or 3, wherein the equipment comprises a mask, visor or hood.
 - 5. Breathing equipment according to my preceding claim, wherein the acoustic coupling means comprises a sound pipe.
 - 6. Breathing equipment according to claim 5, wherein the sound pipe is made of flexible tubing.
 - 7. Breathing equipment according to claim 6, wherein the remote end of the sound pipe enters a compartment which also contains the microphone.
 - 8. Breathing equipment according to claim 7, wherein the compartment together with the face part comprise a single pressure chamber.
- 20 9. Breathing equipment according to claim 5, wherein there is a gaseous or liquid pressure transmission medium in the sound pipe.
 - 10. Breathing equipment according to claim 1, wherein the local end of the acoustic coupling, which is associated with the face part, terminates in a sound collector.
- 25 11. Breathing equipment according to claim 10, wherein a membrane is provided over the upper end of the sound pipe.
 - 12. Breathing equipment according to claim 10, wherein the sound collector is a flared upper end of the sound pipe.
- 13. Breathing equipment according to claim 10, wherein the sound30 collector is a mouth covering mask.
 - 14. Breathing equipment according to claim 13, wherein the sound pipe enters the mask through a port.
 - 15. Breathing equipment according to claim 13, wherein the sound pipe enters the mask through inhalation or exhalation valving.
- 35 16. Breathing equipment according to any preceding claim, wherein two microphones are connected in a noise cancelling arrangement.

17. Breathing equipment according to claim 16, wherein a first microphone picks up noise plus speech signals, and a second microphone is arranged to pick up only the noise signals; an electronic circuit subtracts the two signals in order to provide a clean speech signal.

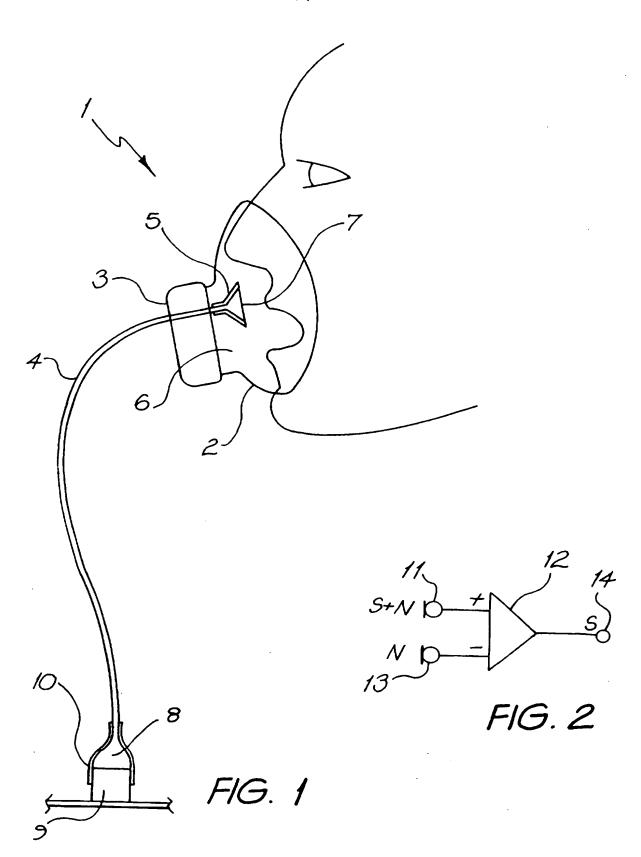



International Application No. **PCT/AU 97/00216**

Α.	CLASSIFICATION OF SUBJECT MATTE	CR			
Int Cl ⁶ : A	62B 18/08, B63C 11/26, G10K 11/22				
According to	International Patent Classification (IPC) or to b	anth national classification at ITO			
According to International Patent Classification (IPC) or to both national classification and IPC B. FIELDS SEARCHED					
Minimum documentation searched (classification system followed by classification symbols)					
	and the second system to now early	by classification symbols)			
AU: IPC, A	n searched other than minimum documentation to the A62B 18/08, B63C 11/26, A61M 16/06, A42	extent that such documents are included in B 3/28, 3/30, G10K 11/12, G10K 1	the fields searched 1/22		
Electronic data	base consulted during the international search (name	e of data base and, where practicable, search	h terms used)		
DERWENT	, JAPIO; (Mask or Visor or Hood or Breath:) and (microphone) and (coupl: or pi	pe or tube)		
C.	DOCUMENTS CONSIDERED TO BE RELEVA	NT			
Category*	Citation of document, with indication, where a	appropriate, of the relevant passages	Relevant to claim No.		
X	US, 4537276 A (CONFER) 27 August 1985 Abstract				
	IIC 2194556 A (LARKED 10 M. 1046		1-17		
X	US, 3184556 A (LARKIN) 18 May 1965 entire specification				
	GB 2084428 A (GENTEX CORPORATION)	7 April 1982			
X	Abstract, page 2 lines 45-51, page 3 lines 56-7	0	1-4, 10, 13, 16, 17		
X Further documents are listed in the continuation of Box C X See patent family annex					
		T" later document published after the in	ternational filing date or		
not con	ent defining the general state of the art which is usidered to be of particular relevance	priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention			
interna	tional filing date	X" document of particular relevance; the be considered novel or cannot be considered.	claimed invention cannot		
or which is cited to establish the publication date of "Y" document of particular relevance; the clayped invention care					
another citation or other special reason (as specified) document referring to an oral disclosure, use, be considered to involve an inventive step when the document combined with one or more other such documents, such					
exhibit 'P" docume	ion or other means ont published prior to the international filing "&	combination being obvious to a person document member of the same patent	n skilled in the art		
date but later than the priority date claimed					
19 May 1997	is completion of the international search	Date of mailing of the international search	h report		
lame and mailir	ng address of the ISA/AU	2 3 MAY 1997 Authorized officer			
USTRALIAN I O BOX 200	NDUSTRIAL PROPERTY ORGANISATION	9			
VODEN ACT : LUSTRALIA	2606 Facsimile No.: (06) 285 3929	I.A.BARRETT			
	(, 3/6/	Telephone No.: (06) 283 2189			

Form PCT/ISA/210 (second sheet) (July 1992) coppaj



ernational Application No.
PCT/AU 97/00216

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
Х	WO, 94/05372 A BRETAGNE RADIO COMMUNICATIONS) 17 March 1994 Abstract, page 3 line 7, page 4 line 3	1-17			
x	WO, 91/12051 A1 (HOK INSTRUMENT AB) 22 August 1991 Abstract, page 2	1, 2, 4-10, 12			
x	WO, 91/07859 A1 (ACTRON MANUFACTURING COMPANY) 30 May 1991 Abstract, page 9-11	1-17			
x	WO, 82/03160 A1 (CHAISE, Francois) 30 September 1982 Abstract	1, 4-17			
x	FR, 828843 A (DECOMBE) 31 May 1938 entire specification	1-17			
Α	US, 4013992 A (DEWBERRY et al) 22 March 1977 Abstract				
Α	GB, 2058578 A (The Secretary of State for Defence) 15 April 1981 Abstract				
Α	EP. 377316 A2 (NOETZEL) 11 July 1990 Abstract				

Form PCT/ISA/210 (continuation of second sheet) (July 1992) coppaj

INTERNATIONAL SEASON REPORT



International Application No. PCT/AU 97/00216

Information on patent family members

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member						
GB	2084428	DE	3137113	FR	2490431	IT	1138220	
		US	4374301					
wo	9405372	FR	2695039					
wo	9112051	AU	72472/91	EP	534975	SE	9000552	
		SE	466188	US	5195528			
WO	9107859	EP	452486	JΡ	4504346	US	5138666	
		US	5371804	US	4901356			
wo	8203160	AU	82054/82	EP	74969	FR	2502372	
		FR	2510793					
EP	377316	CA	2005351	US	4980926	ZA	8909661	

END OF ANNEX

Form PCT/ISA/210 (extra sheet) (July 1992) coppaj

THIS PAGE BLANK (USPTO)